


品名	FSP150-P37J-A12	FSP150-P37J-A24	FSP150-P37J-A48
定格入力電圧	AC 100~240V	AC 100~240V	AC 100~240V
入力電圧範囲	AC 85~264V	AC 85~264V	AC 85~264V
定格入力電流	2.5A typ (AC 100V, Load 12.5A) 1.2A typ (AC 230V, Load 12.5A)	2.5A typ (AC 100V, Load 6.3A) 1.2A typ (AC 230V, Load 6.3A)	2.5A typ (AC 100V, Load 3.2A) 1.2A typ (AC 230V, Load 3.2A)
出力電圧	12.0V (±5%)	24.0V (±5%)	48.0V (±5%)
出力電流範囲	0~12.5A	0~6.3A	0~3.2A
動作周囲温度 (デレーティング領域含む)	-20~+70°C	-20~+70°C	-20~+70°C
外形寸法	L160 × W75 × H23.5mm	L160 × W75 × H23.5mm	L160 × W75 × H23.5mm
質量	320g	320g	320g
安全認証	cCSAus, CE	cCSAus, CE	cCSAus, CE
安全基準	UL62368-1, EN62368-1, PSE準拠	UL62368-1, EN62368-1, PSE準拠	UL62368-1, EN62368-1, PSE準拠

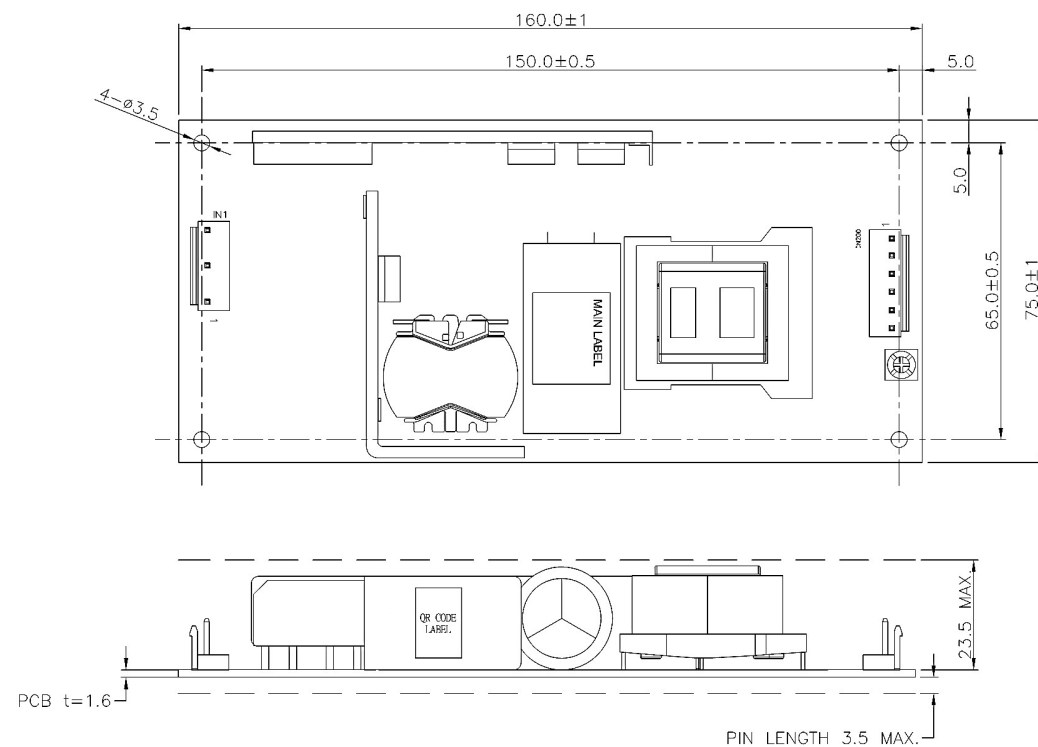

Pin assignment of IN1

Pin No.	Function	Wafer
1	L	JST B3P5-VH or EQUIVALENT
2		
3	N	
4		
5	FG	

Pin assignment of CN200

Pin No.	Function	Wafer
1	-V	JST B6P-VH or EQUIVALENT
2	-V	
3	-V	
4	+V	
5	+V	
6	+V	

UNIT: mm

名称

150W 定電圧電源 : 12V型/24V型/48V型

図番

FSP150-P37J-Axx